



Handling & Transport Equipment


Heavy-Duty Shifting Skates

2

SLFW 12 t, complete set



SLFW 36 t, complete set

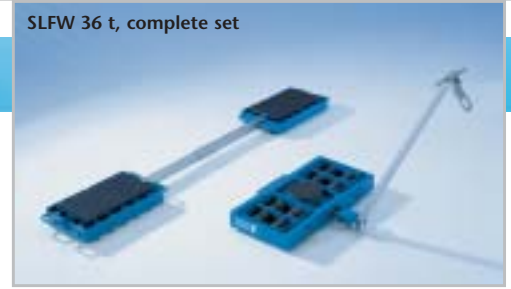

SLFW 24 t, complete set



SLFW 10 t, complete set



SLFW Heavy-Duty Shifting Skate Transport System

This heavyweight contender of shifting skate is designed for maximum weight performance for all industries; riggers, speciality carriers, and machinery movers – with absolutely outstanding maneuverability. Thanks to the shifting skate system – with modular cassette elements of 6 tons and up – and thrust bearing mounted load rotating plate, one can negotiate even the tightest of curves. With our recently developed 72 metric ton heavy-duty running gear system, we have also taken into account everything concerning your operating convenience. The adjustable running gear provides optimum load capacity and the ball bearing-mounted rollers guarantee smooth running. Remove this as using a fork truck.

Art. No.	Running gear steerable	Running gear adjustable	Load capacity t	Overall height mm	Length mm	Width approx. mm	Weight approx. kg
034574110	•	-	4	110	280	250	13
034574207	•	-	6	110	475	260	34
034574118	-	•	6	110	270*	130*	20
034574215	-	•	12	110	260*	320*	50
034574304	•	-	12	110	775	375	62
034574312	-	•	24	110	520*	320*	90
034574313	-	•	24	150	300*	345*	90
034574305	•	-	24	150	1120	430	169
034574314	-	•	48	150	605*	350*	176

* each shifting skate

Dimensions of shifting skates with steerable running gear

Art. No.	Load capacity t	Rotary plate Ø mm	Control handle Length in mm	No. of load rollers	Rollers Ø mm	Roller width mm	No. of cassette elements mobile
034574110	4	160	1020	4	83	60	-
034574207	6	170	1190	8	83	50	2
034574304	12	180	1230	16	83	50	2
034574305	24	265	1440	16	115	60	4

Dimensions of shifting skates with adjustable running gear

Art. No.	Load capacity t	Load capacity per roller t	Connecting rod adjustable mm	Dim. of carrying platform rubber mm	Number of load rollers mm	Rollers Ø mm	Roller width mm
034574118	6	3	300-1000	150 x 130	2 x 4	83	50
034574215	12	6	500-1500	265 x 230	2 x 6	83	60
034574312	24	12	1040-1550	440 x 230	2 x 12	83	60
034574313	24	12	600-1500	270 x 230	2 x 8	115	60
034574314	48	24	1200-2050	530 x 230	2 x 16	115	60

Other versions available on request!